


Instructivo configuración

Wifi de módem ARRIS TG2482




1. Conéctese al internet del módem, de manera alámbrica con un cable de red o vía Wifi con un equipo inalámbrico (celular, Tablet, laptop).

Acceda a la configuración del módem escribiendo en su navegador la siguiente dirección **IP: 192.168.100.1:8080**

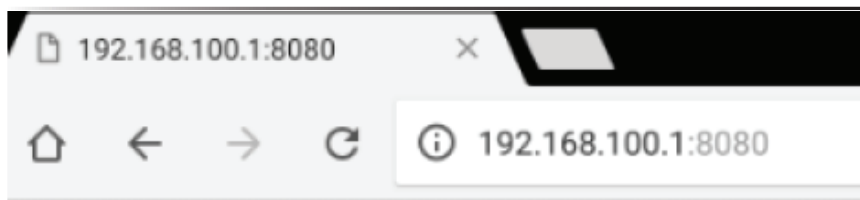

2. En la siguiente pantalla coloque **Usuario: cusadmin** y **Contraseña: password**.

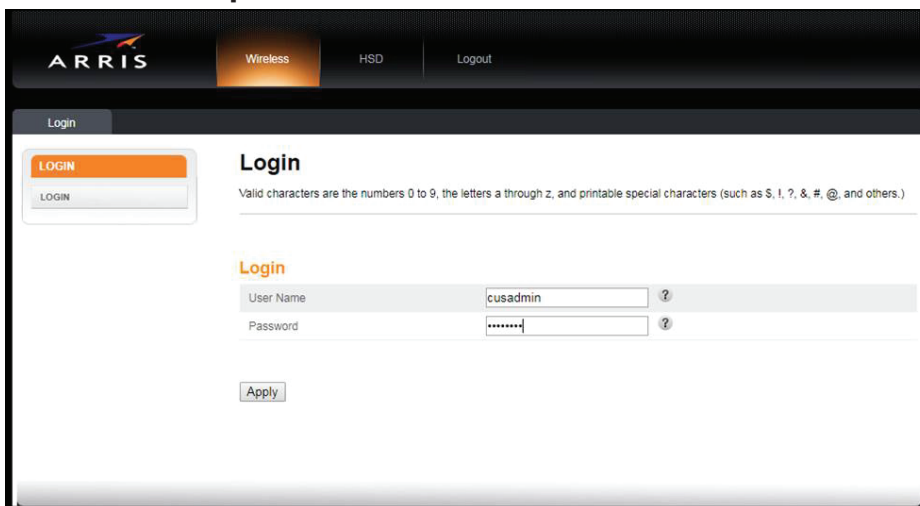

3. En la siguiente pantalla saldrán dos redes Wifi, una Wireless 2.4 GHz y otra Wireless 5GHz, se debe cambiar nombre y contraseña en las dos.

1. Wireles 2.4 GHz:

En la opción Wireless Network Name (SSID) coloque el nombre el Wifi deseado, luego vaya a la opción Pre-Shared Key y coloque la contraseña, debe ser de mínimo 8 caracteres.

2. Wireles 5GHz:

En la opción **Wireless Network Name (SSID)** coloque el nombre del Wifi deseado agregando 5G al final para identificar la red 5G y luego vamos a la opción **Pre-Shared Key** y coloque la contraseña, debe ser de mínimo 8 caracteres.

Guarde los cambios seleccionando la opción **“Apply”**.

The screenshot shows the 'System Basic Setup' page in a router's web interface. The page has a navigation bar at the top with tabs for 'Basic Setup', 'WAN Setup', 'LAN Setup', 'Wireless 2.4 GHz', 'Wireless 5 GHz', 'Firewall', and 'Utilities'. The 'Basic Setup' tab is selected. On the left side, there is a sidebar with 'BASIC SETUP', 'BASIC SETUP', and 'LOGIN SETTINGS' options. The main content area is titled 'System Basic Setup' and contains several sections:

- Basic Setup:** Includes fields for Language (English:English:English), Host Name (ARRISGW), and Routing Enabled (checked).
- Wireless 2.4 GHz:** Includes 'Enable Wireless' (checked), 'Wireless Network Name (SSID)' (Sala de Experiencia), and 'Pre-Shared Key' (AItice1234).
- Wireless 5 GHz:** Includes 'Enable Wireless' (checked), 'Wireless Network Name (SSID)' (Sala de Experiencia_5G), and 'Pre-Shared Key' (AItice1234).
- 2.4G/5G WPS Settings:** Includes 'WPS Enable' (checked) and 'Start WPS Association' (disabled).

At the bottom of the page, there is an 'Apply' button. Blue arrows point to the SSID and Pre-Shared Key fields in both the 2.4 GHz and 5 GHz sections, and to the Apply button.